




## **AA917 CLEAN ROOM WALL STATION**

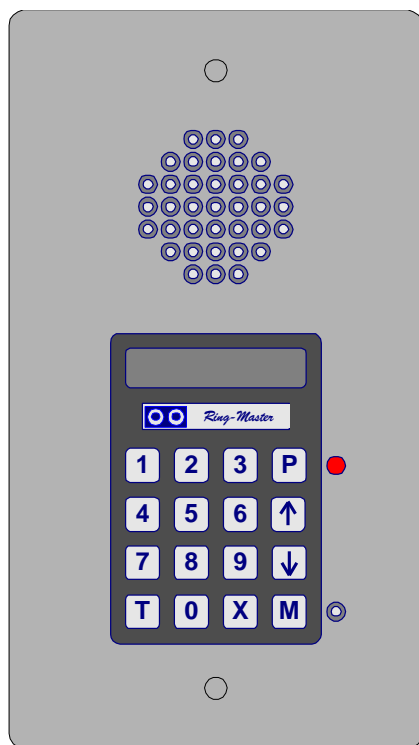

**Front Foil is Antimicrobial treated.**

**Front foil is washable.**

**Loudspeaking hands-free operation.**

**Flush or Wall mountable with appropriate Back box.**

**Voice controlled "Duplex" communication.**

**Full keypad with access to all system features.**

**Sensitive electret microphone.**

**Volume control on front panel.**

**Privacy Switch.**

**Compatible with Ring-Master Systems  
CB901, CB901CA, CB901EX, RM5000 and RM5000EX**

**Made in USA**

### **DESCRIPTION:**

The AA917 has speaker and microphone for normal hands free speech with a range of 3-5 meters (10-15 feet). The station's key board consists of 10 numeric dialing keys (DTMF), push-to-talk key (T), cancel key (X), volume UP/DOWN keys, privacy key (P) and a microphone mute key (M), allowing full access to all features offered by the system.

A status LED is used for indicating station-ON and Privacy.

### **FEATURES:**

The Clean Room Station AA917 is designed for hospital operating rooms, patient isolation rooms, biological laboratories, restaurants and clean room manufacturing.

The station front foil is made with Microban® technology that provides dependable protection against bacterial contamination. When bacteria comes into contact with the foil, the antimicrobial function disrupts the bacterial cell wall killing or inhibiting bacterial growth.

The foil is resistant to chemicals and cleaners and offers excellent scratch resistance.

Use this Intercom when cleanliness is a key consideration. Use optional I/O Board (IF932) for output to dome light and inputs from switches.

## ORDERING INFORMATION:

**AA917** Wall master station  
**IF932** Input/Output Board (for T, 0, X, Strobe...)  
**BBF863** Flush back-box  
**BBS863** Surface back-box  
**BBD905** Desk back-box

## TECHNICAL DATA AA917

**Operating Voltage:**  
20-27 V DC

**Power Consumption:**  
150 mA max.

**Dimensions (HWD):**  
250mm x 140mm x 40mm  
(9.85" x 5.5" x 1.6" )

**Weight:**  
0.52Kg (1.6 lb)

**Speaker output:**  
1 watt

**Central Exchange Connections:**  
Terminated in RJ45 Connector.  
1 twisted pair (UTP) for audio/signaling.  
1 twisted pair (UTP) for power.

**Line Specifications:**  
Audio: Galvanic line,  
Frequency range: 300-5000 hZ  
Normal speech level: -12 dBm  
Max. speech level: +4 dBm  
DTMF signaling: -10 dBm

**Microbe protection against:**  
MRSA  
E.coli 0157  
Listeria monocytogenes  
Pseudomonas aeruginosa  
Salmonella spp  
Bacillus cereus

Streptococcus faecalis  
Klebsiella spp  
Aspergillus niger  
Penicillium purpurogenum  
Phoma violacea  
Sacch.Cerevisiae



57 TRADE ZONE DRIVE  
RONKONKOMA, N.Y. 11779 USA

Tel: 1-631-585-7464    mail@RingComm.com  
Fax: 1-631-585-7410    http://www.RingComm.com

